

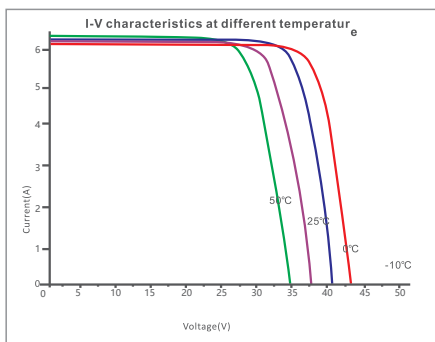
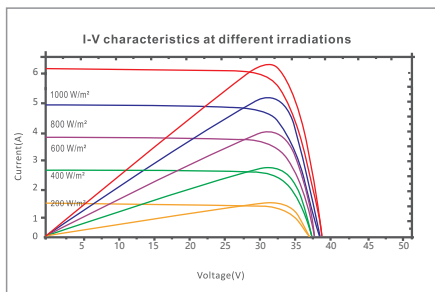


RS6F-M

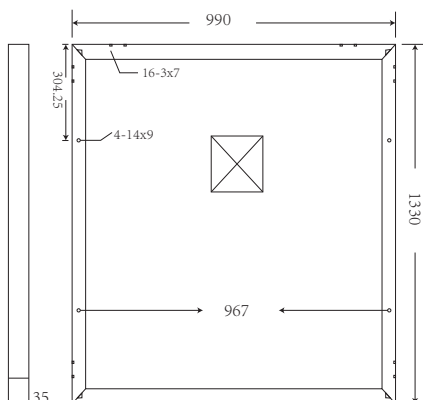

GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER

Dimension of PV Modules Unit: mm

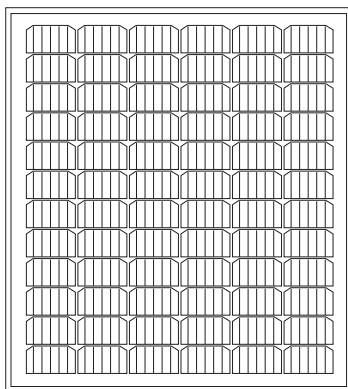

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	200W
Open Circuit Voltage-Voc(V)	47.80V
Short Circuit Current-Isc(A)	5.41A
Maximum Power Voltage-Vmp(V)	41.10V
Maximum Power Current-Imp(A)	4.99A
Module Efficiency (%)	16.57%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax (Wp)	153W
Open Circuit Voltage-Voc (V)	44.79V
Short Circuit Current-Isc (A)	4.37A
Maximum Power Voltage-Vmp(V)	38.28V
Maximum Power Current-Imp(A)	4.00A

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Mono-crystalline 156x93mm, 4 or 5 Bus bars
Cell configuration	72 cells(6x12)
Module dimensions	1217x992x35mm
Weight	13KGS
Front Cover	3.2mm Tempered Glass
Frame Material	Anodized Aluminum Alloy
J-BOX	IP65 or IP67, 6 Diodes
Cable	4mm ² (IEC)/12AWG(UL),1000mm
Connectors	MC4 or MC4 Comparable
Standard Packaging	29pcs/pallet

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.39%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1000V(IEC)/600V(UL)
Max Series Fuse Rating	10A
Limiting Reverse Current	10A

PACKAGING CONFIGURATION


	40HQ	20GP
Number of modules per container	1320pcs	604pcs
Package	2pcs/carton box	1pcs/carton box
Package Weight	15.5kg/carton box	15.5kg/carton box
Package Number	1320carton boxes	604carton boxes
Package Dimension	1340*1000*45mm/carton box	1340*1000*45mm/carton box



RESUN SOLAR ENERGY CO.,LTD.



WWW.RESUNSOLAR.COM

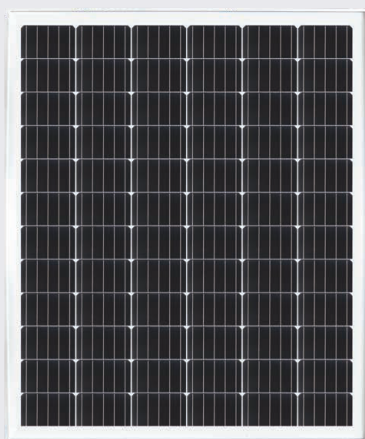

72 Cells

Mono-crystalline

200W

Power output


16.57%

The Highest Efficiency

0~+5W

Tolerance

**0.5% Annual Degradation
over 30 years**

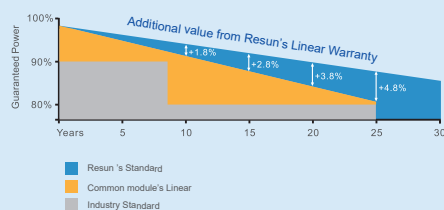

RS6F-M

RS6F-M is a robust solar module with 72 solar cells. These modules can be used for on-grid solar applications. Our meticulous design and production techniques ensure a high-yield, long-term performance for every module produced. Our rigorous quality control and in-house testing facilities guarantee Resun Solar's modules meet the highest quality standards possible.



High module conversion efficiency (up to 16.57%), through superior manufacturing technology



Guaranteed 0~+5W positive power output tolerance ensures high reliability



Anti-reflective, hydrophobic coating improves light absorption and reduces surface dust



Excellent performance under low light environments (mornings, evenings and cloudy days)



Suitable for harsh environments, such as coasts, deserts and lakes. Withstand high level of wind loads (2400pa) and snow loads (5400pa)

Full range of products and certification systems

ISO 9001 TUV PID-FREE CE IEC61215/61730/61701/62716



LINEAR PERFORMANCE WARRANTY

12 year Product Warranty / 30 year Linear Power Warranty